

Ultra Stretch Signage | 88BH7F

Ultra Stretch Signage, 32:9 Space-Fitting Wide Screen

The 88BH7F is the most suitable display for delivering new forms of advertising and multiplexed information in a 32:9 widescreen format that brings you a new experience, captivating customers' attention.



32:9 Wide Screen



High Picture Quality



Effective Content Delivery



Efficient Operation



* All images are for illustrative purposes only.


32:9 Extended Wide Format

It is a unique wide screen with 32:9 bar type which provides much more flexibility in playing content than the conventional display of 16:9 ratio.



Ultra HD Resolution (3,840 x 1,080)

Ultra HD resolution delivers an immersive viewing experience with vivid colors and clear images.

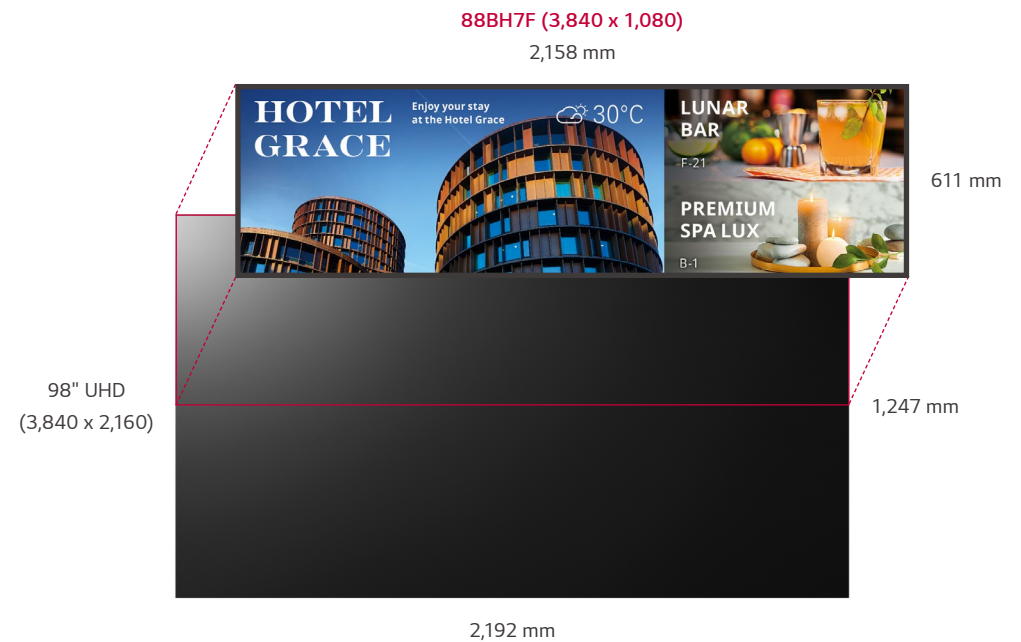

Flexibility for Content Management

The 88BH7F is able to organize multi content with video and text according to user's desired ratio. Also, it is optimized to show a vertical or horizontal object without truncation, providing lifelike viewing experiences to the customers.




Multi Screen Mode with 4PBP

The Picture-by-Picture (PBP) feature allows you to show multi content in one single display by up-to four parts. It is very useful and convenient to deliver various advertisements or pieces of information at the same time without calibration.



High Performance SoC with webOS

Built-in Quad Core SoC can execute several tasks at once while providing smooth content playback without the need for a media player. Also LG webOS platform enhances user convenience with intuitive GUI and simple app development tools.

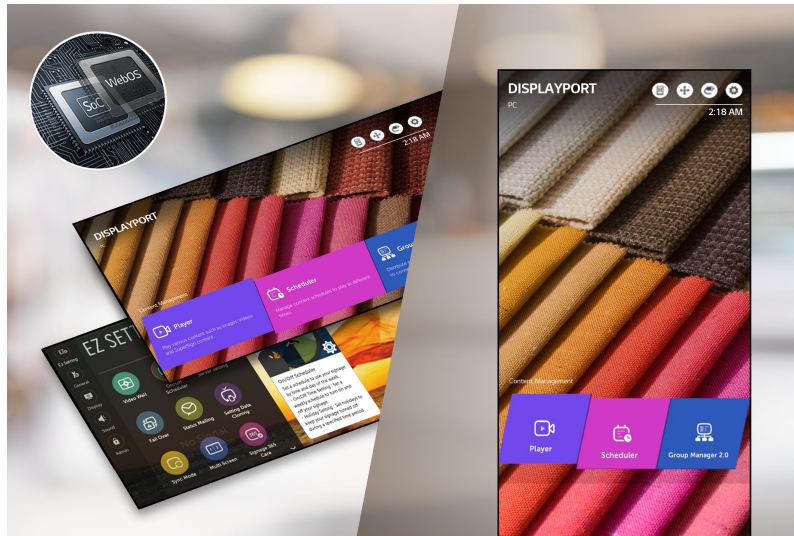


Tiled Scene with Immersive View

The 88BH7F can show a tiled scene by up to 15 x 15 configuration. This will be the best choice if you want to use a large screen, or provide visual impact to your customers in a different way.



LAN Daisy Chain Management

By using this daisy-chained network feature, you can execute commands such as controlling, monitoring and even updating firmware.

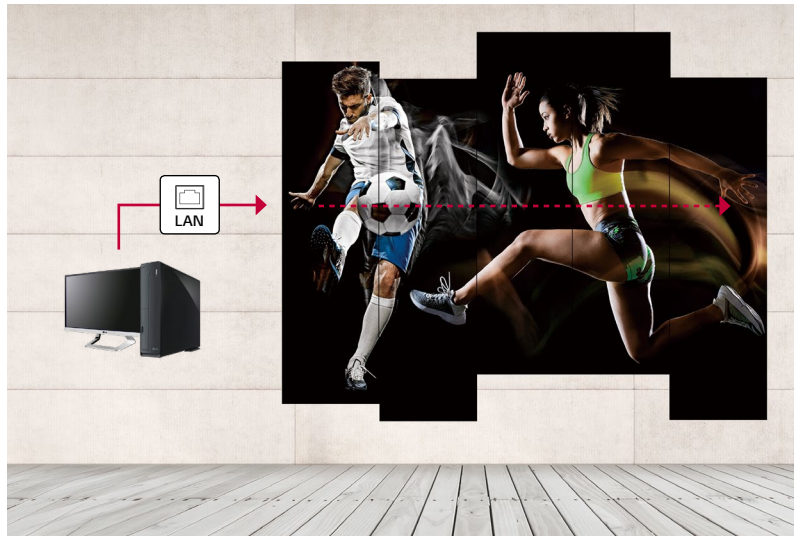


Real-Time Monitoring with Signage365Care

Easier and faster maintenance are available with our optional cloud service solution Signage365Care*. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, ensuring the stable operation of clients' businesses.




* The availability of the "Signage365Care" service differs by region, so please contact the LG sales representative in your region for more details.

DIMENSION (unit: mm)

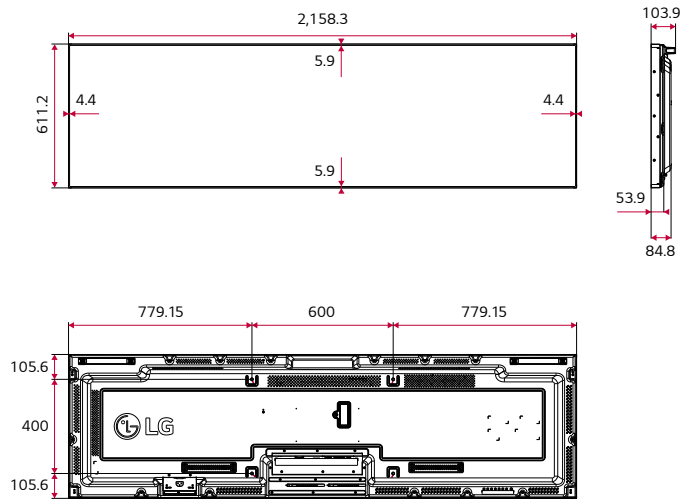

CONNECTIVITY

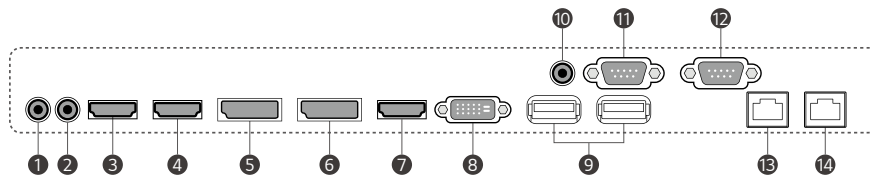

- ① AUDIO In
- ② AUDIO Out
- ③ HDMI(1) In 2.0
- ④ HDMI(2) In 2.0
- ⑤ DP In
- ⑥ DP Out
- ⑦ HDMI(3) In 1.4
- ⑧ DVI-D In
- ⑨ USB 2.0 In
- ⑩ IR & LIGHT SENSOR
- ⑪ RS-232C In
- ⑫ RS-232C Out
- ⑬ LAN In
- ⑭ LAN Out



* Dimensions & Jack Panels (Read/Side) may differ from the above image, so please contact LG salesteam to verify before ordering.

SPECIFICATIONS

88BH7F

Panel	Screen Size.8	88"
	Panel Technology	IPS
	Aspect Ratio	32:9
	Native Resolution	3,840 x 1,080
	Brightness	700 cd/m2 (Typ.)
	Contrast Ratio	1,100:1
	Viewing Angle (H x V)	178 x 178
	Response Time	8ms (G to G)
	Surface Treatment (Haze)	3%
	Lifetime	50,000 Hrs (Typ.)
Operation Hours	24 Hrs / 7 Days	
Orientation	Landscape & Portrait	
Connectivity	Input	HDMI (3), DP, DVI-D, Audio, USB 2.0 (2)
	Output	DP, Audio
	External Control	RS232C In/Out, RJ45 (LAN) In/Out, IR In
Physical Specification	Bezel Color	Black
	Bezel Width	4.4 mm (L/R), 5.9 mm (T/B)
	Monitor Dimension (W x H x D)	2,158.3 x 611.2 x 84.8 mm
	Weight (Head)	33.9 kg
	Carton Dimensions (W x H x D)	2,274 x 717 x 212 mm
	Packed Weight	51.7 kg
	Handle	Yes
VESA™ Standard Mount Interface	600 x 400 mm	
Special Features	Internal Memory 8GB(System 4GB, Available 4GB), Built-in Wi-Fi, Temperature Sensor, Auto Brightness Sensor, USB Plug & Play, Local Contents Scheduling, Group Manager, Failover, Background Image (Booting Logo, No Signal), Sync Mode (RS-232C/Local Network), PBP(4), Screen Rotation, External Input Rotation, Tile Mode Setting (Max. 15x15), Setting Data Cloning, Crestron Connected®, Control Manager, Smart Energy Saving, PM Mode, Wake on LAN, HDMI-CEC®, webRTC, SI Server Setting	
Environment Conditions	Operation Temperature Range	0 °C to 40 °C
	Operation Humidity Range	10 % to 80 %
Power	Power Supply	100-240V-, 50/60Hz
	Power Type	Built-In Power
	Power Typ. / Max.	450 W / 530 W
	Consumption Smart Energy Saving	210 W
Standard (Certification)	Safety	CB, NRTL
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes (EU Only) / No
Media Players Compatibility	OPS Type Compatible	Yes (Piggyback)
Software Compatibility	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/ Control+
	Signage365Care	Yes
Accessories	Basic	Remote Controller, Power Cord, DP Cable, RS-232C Cable, IR/Light Sensor Receiver, Manual
	Optional	OPS Kit (KT-OPSF)

1) Network based control 2) Compatibility may differ by equipment



Download
LG C-Display+
Mobile App
Google Play Store

www.lg.com/b2b

www.youtube.com/c/LGECCommercialDisplay

www.facebook.com/LGInformationDisplay

www.linkedin.com/company/lginformationdisplay

LG may make changes to specifications and product descriptions without notice.
Copyright © 2019 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.

